

Electronic DC Load

Series ELA Power 250 Watt

Constant I-Mode or R-Mode
Master-Slave Mode

ext. programmable I-constant, without a
G-Module installed
ext. programmable I-,U-,P- or G- constant
with a G-Module installed

Options a.o.:
Installed IEEE488.2 (GPIB) / RS232* / USB*
interface with Lab-View Driver (Series INT2E)
Installed USB Interface with driver software
External CAN Open Interface (on request)
G- Module
Front-End Unit
*selectable RS232 or USB

The Series ELA 250 load are electronic regulated DC loads with power up to 250Watt. It is designed at the latest MOS technologie with a DC load range starting at 0.35VDC up to 160VDC. Everywhere, DC loads are needed as a stand alone type or integrated via interface in any system applications, the ELA 250 series offers most intelligent features such as:
Minimum load voltage 0.35VDC / Load ON/OFF / Remote Control Port (RCP) with additional +15VDC voltage to supply external components / Local-Lockout / U- and I-Monitor outputs buffered / Load-On-Relay at Power-Up / a.m.m.

Input:

Input voltage	230VAC -10% +6%, 50-60Hz
Load voltage	see table
Load current	see table
Continuous Power	see table

Regulation:

Set point accuracy (Voltage change $\pm 20\%$)	$\leq 0,1\% I_{max}$
Rise time (at 10-90% nominal value change I-Mode)	
ELA250/75/20, ELA250/75/40	$U_L > 3V \leq 60\mu s$ $U_L < 3V \leq 400\mu s$
ELA250/160/20	$U_L > 6V \leq 60\mu s$ $U_L < 6V \leq 400\mu s$
Temperature coefficient (after 15 min. working time, const. $T_{ambient}$ and U_{mains})	$\leq 0.01\%/^{\circ}C I_{max}$

Protection:

Overload protection	power limit, short circuit protection
Overvoltage protection	power shutdown $U_{max} +6\%$
Thermal protection	power shutdown, auto recovery
Reverse polarity	wattless current diode and fuse

Environmental Condition:

Operating temperature	0 - +40°C (non condensing)
Cooling	int. fans, temperature controlled

Safety:

Safety standard	EN 61010-1
Isolation	
AC input - load input	2.3kV _{eff}
AC input - protective ground	1.35kV _{eff}
Load input - protective ground	$U_L \leq 75V: 500V_{eff}$ $U_L = 160V: 1kV_{eff}$

EMC:

Input EMI filter	EN61000-6-3
Input immunity	EN61000-6-1

Control, operation and instruments:

Manual adjust	current and resistance 2 set values each (A and B) for 2 channels selectable with a coarse and fine potentiometer each per channel 100Hz or 1kHz switch-selected, waveform: square-wave, duty cycle 1:1
Pulse-generator I, R	load to be switched at high Ohm state
Load ON/OFF-function	load current $\approx$ setpoint load current ≈ 0 at any setpoint
Load ON function	load current, load voltage:
Load OFF function	LED digital
Instruments	load current $\leq 50A: 3\text{-digits}$ load current = 100A: 3.5-digits load voltage $\leq 75V: 3\text{-digits}$ load voltage 160V: 3.5-digits accuracy: 0.2% $\pm 1d$
Error indication	LED red: over temperature or over voltage LED yellow: current limiting or power limiting
Parallel operation	same units possible

Programming Interface (Remote Control Port):

Load ON/OFF function	jack RJ45 ext. control voltage 0 - 10V = 0 - I_{max} any waveform, bandwidth: (-3dB): 0 - 6kHz accuracy: 0.2% I_{max} Load to be switched at high Ohm state
Monitor signal	Load current, load voltage accuracy 0.2% I_{max} , U_{max}
Disturbance signal	composit failure (active low) (OR-link at following failures: over temperature, over voltage, power limiting, current limiting)



Electrical Connections:

Input voltage	Euro-plug with switch, rear side
Load	jack 4mmØ ≤ 40A

Dimensions and weight:

mounting form	see table
Dimensions	
Weight	The loads can be delivered as tabletop unit or as 19" rack mounted module.

Option G-Module:

Programming	2 set values each at I-, U-, P-, G- Mode ext. voltage 0 - 10V = 0 - I _{max} ext. voltage 0 - 10V = 0 - P _{max} ext. voltage 0 - 10V = 0 - G _{max} ext. voltage 0 - 10V = 0 - U _{max} Load current ≙ setpoint Load current = 0 at any setpoint 1Hz, 10Hz, 100Hz or 1kHz* to be switched, waveform: square wave duty cycle 1:1 *1kHz in U-Mode not available
Load ON function	
Load OFF function	
Pulse generator I, G, P, U	

Feed back signal	load current, load voltage (0 - 10V)
------------------	---

Disturbance signals	accuracy: 0.2% I _{max} , U _{max} signal: composit failure (active low) signal: over temperature, over voltage signal: over load, current limitation signal: under voltage
---------------------	--

Lead for programming	25 pol. Sub D jack
----------------------	--------------------

output- power (W)	DC load- voltage (V)	Load- current (A)	Load- resistance (Ohm)	Model- Number
250	0.35 - 75	0 - 20	0.05 - 15k	ELA250/75/20
250	0.35 - 75	0 - 40	0.04 - 7.5k	ELA250/75/40
250	0.35 - 160	0 - 20	0.05 - 32k	ELA250/160/20

Pin assignment RCP-Interface (Remote Control Port):

RCP	SIGNAL (RJ45)
Pin8	Analog-GND
Pin7	Control Voltage 0-10V
Pin6	Actual load current 0-10V
Pin5	Actual load voltage 0-10V
Pin4	Signal composit failure
Pin3	Command Load ON/OFF
Pin2	Digital-GND
Pin1	Auxiliary voltage +15V (max. 20mA load capacity)

Options:

- Sub front panel
colour AL nature anodized
ELA 250 without INT2E: 6HE, 16TE
ELA 250 with INT2E: 6HE, 19TE
- Front-End unit without operation instruments
- CAN Open interface (on request)
- G-Module
- RJ45 connector for ELA 250 (with option G-module
at ELA 250 ...: Sub D connector is a standard)
- Integrated Interface IEEE488.2 (GPIB)/RS232*/USB*
INT2E with Lab-View driver

Option INT2E:

Programming	2 set values each at I-, P-, G-Mode with G-module, (1 set value at I-Mode without G-module) resolution : 12Bit (4000 steps per range) accuracy: 0.25% I _{max} (I-Mode) 1Hz, 10Hz, 100Hz or 1kHz* to be switched, waveform: square wave duty cycle 1:1 *1kHz in U-Mode not available
Puls generator I, G, P, U	load current, load voltage resolution: 12 Bit (I _{max} /4000; U _{max} /4000) accuracy: 0.25% I _{max} , U _{max} Load current ≙ setpoint Load current = 0 at any setpoint in remote the operation instruments at the front panel are not active signal: composit failure signal: over temperature, over voltage signal: powerlimiting, current limiting signal: under voltage
Monitor signal	9 pole Sub D connecor (RS232)
Load ON function	24 pole IEEE488/GPIB-jack
Load OFF function	USB-jack type B
Function Local Lockout	
Error signal	
Connectors	

Shape, Dimensions, Weight

Description		Shape	Width (mm)	High (mm)	Deep (mm)	Weight (kg)
Load without Interface						
Load as tabletop unit	6U	A	70	220	340	4
Load with sub front panel for 19" rack mounting	6U	A - T FPL	70	220	340	4
Load as 19" rack mounting unit with 2pcs ELA250	2U	E	483	88,1	340	7,3
Load as 19" rack mounting unit with 1pcs ELA250, mounting on left hand side	2U	E - L	483	88,1	340	4
Load as 19" rack mounting unit with 1pcs ELA250, mounting on right hand side	2U	E - R	483	88,1	340	4
Load with Interface						
Load as tabletop unit	6U	A	95	220	340	4
Load with sub front panel for 19" rack mounting	6U	A - T FPL	95	220	340	4
Load as 19" rack mounting unit with 2pcs ELA250	3U	E	483	132,5	340	8,2
Load as 19" rack mounting unit with 1pc ELA250, mounting on left hand side	3U	E - L	483	132,5	340	4
Load as 19" rack mounting unit with 1pc ELA250, mounting on right hand side	3U	E - R	483	132,5	340	4


Options:

- Cable for external stand alone interface INT2
- IEEE 4888/GPIB - cable
- zero modem cable
- USB cable


* RS232 or USB selectable

Electronic DC Load


ELA 250 Watt:

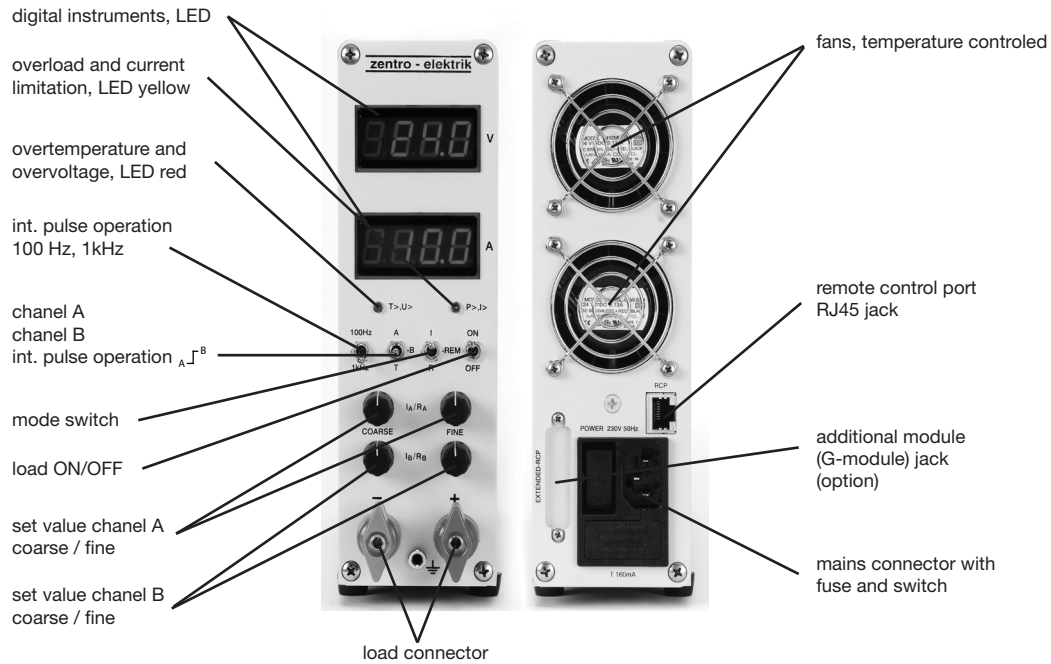


ELA 250 Watt, with Interface:

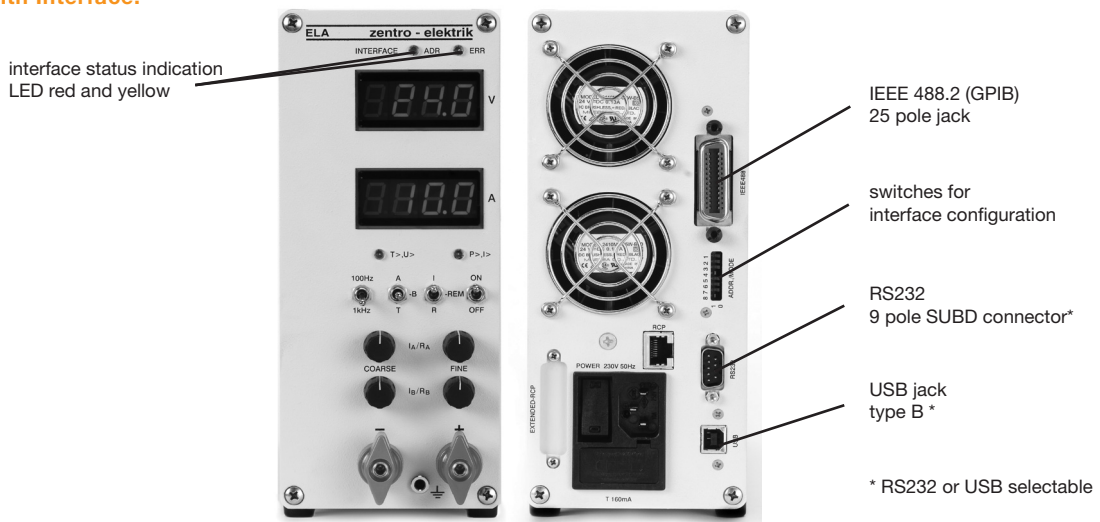


ELA 250 Watt, 2 pieces 19", 2U Front-view:

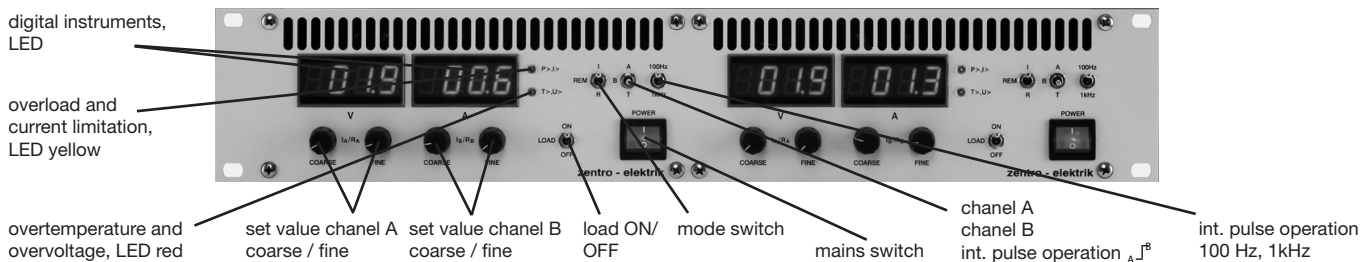


ELA 250 Watt, 2 pieces 19", 2U Back-view:

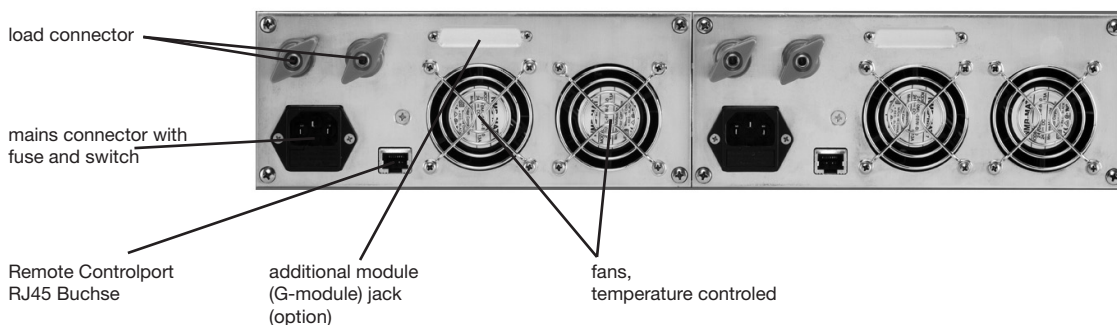

Minimum Voltage ELA250:

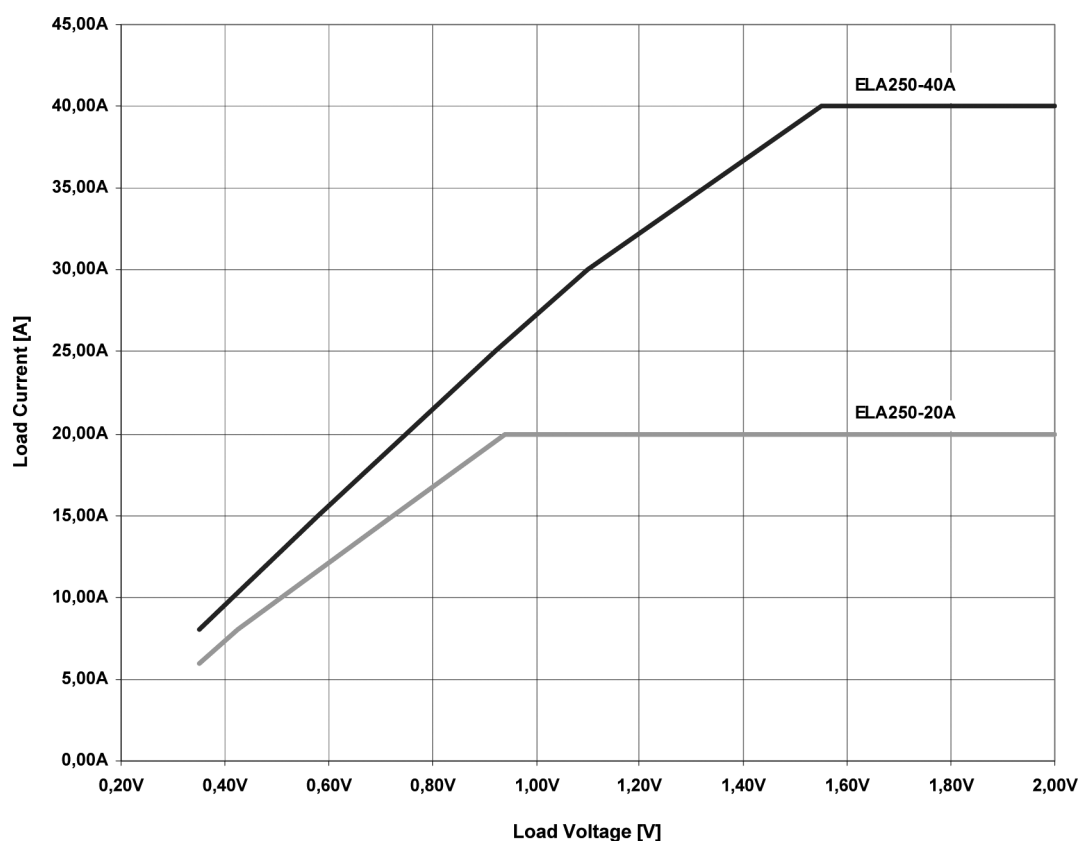

Operating Range ELA250:

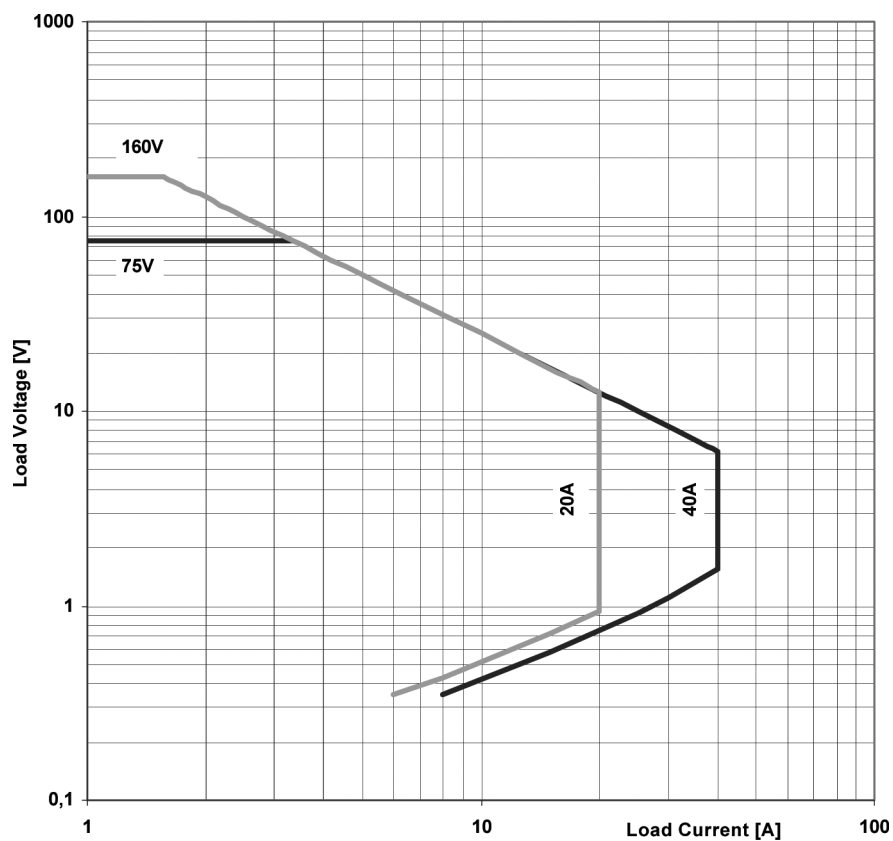

Information & specifications contained in this data sheet are believed to be correct at the time of publication.
However, Zentro-Elektrik accept no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.