DATE	DESCRIPTION OF CHANGE	REV
2022-09-30	XXX	A

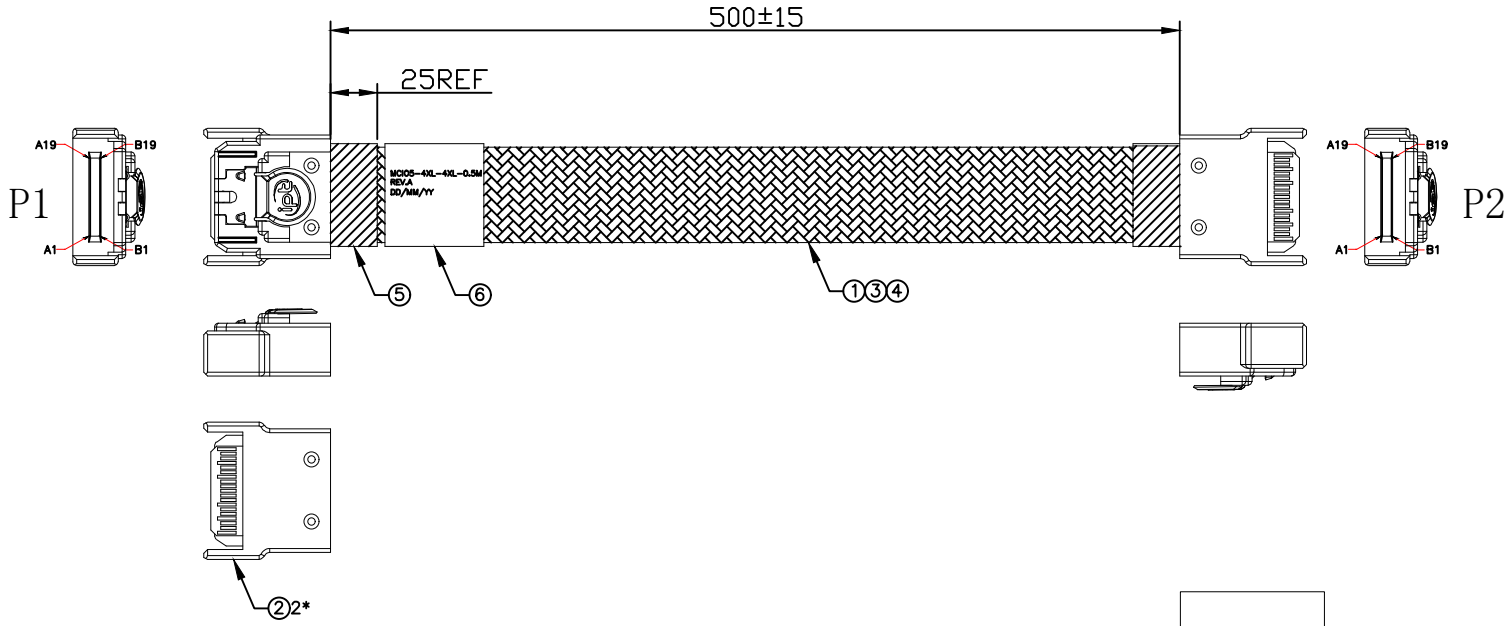



⑥LABEL

P1		P2	
GND	B19	A19	GND
TX3−	B18	A18	RX3−
TX3+	B17	A17	RX3+
GND	B16	A16	GND
TX2−	B15	A15	RX2−
TX2+	B14	A14	RX2+
GND	B13	A13	GND
SB6	B12	A12	SB6
SB2	B11	A11	SB2
SB8	B10	A10	SB8
SB1	B9	A9	SB1
SB0	B8	A8	SB0
GND	B7	A7	GND
TX1−	B6	A6	RX1−
TX1+	B5	A5	RX1+
GND	B4	A4	GND
TX0−	B3	A3	RX0−
TX0+	B2	A2	RX0+
GND	B1	A1	GND
GND	A19	B19	GND
RX3−	A18	B18	TX3−
RX3+	A17	B17	TX3+
GND	A16	B16	GND
RX2−	A15	B15	TX2−
RX2+	A14	B14	TX2+
GND	A13	B13	GND
SB5	A12	B12	SB5
SB4	A11	B11	SB4
SB9	A10	B10	SB9
SB3	A9	B9	SB3
SB7	A8	B8	SB7
GND	A7	B7	GND
RX1−	A6	B6	TX1−
RX1+	A5	B5	TX1+
GND	A4	B4	GND
RX0−	A3	B3	TX0−
RX0+	A2	B2	TX0+
GND	A1	B1	GND

WIRE DIAGRAM

TEST CONDITIONS:

1.100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST
2.CONDUCTIVE RESISTANCE: 3Ω MAX
3.INSULATION RESISTANCE: 10 MΩ
4.HI-POT TEST: 300VDC FOR 10ms.
5.THIS PRODUCT MEETS PCIE 5.0 低损耗

NO.	NAME	IPT NO.	DESCRIPTION	Q'TY	UNIT
⑥	LABEL		WHITE LABEL,LW=40*40	1	PCS
⑤	ACETATE cloth		ACETOUS Tape:25mm WIDE,BLK	–	MM
④	Nylon net		TPE nylon NMS (56 ingot 0.25*12 mesh single strand) OD: 5-12mm black <ROHS,FR,HF>	–	MM
③	WIRE		UL1061 30AWG TS-LF-00 (shaft mounted)	–	MM
②	CONNECTOR		SFF-1016 MCIO 4X 74PIN	2	SET
①	CABLE		29AWG 85Ω HF PCIE: 6.0 低损耗 (P06S62901)	–	MM

serial CABLES

TITLE	MCIO 4XL STR TO MICO 4XL STR CABLE 低损耗					SHEET	1/1
CUSTOMER		CUSTOMER P/N	MCIO5-4XL-4XL-0.5M			DRAWING	chenlingmin
DWG NO.	WIPT20220930003	UNIT	SCALE	REV	VIEW	CHECKED	liupeng
IPT P/N		mm	NONE	C		APPROVAL	