


PROPRIETARY INFORMATION
COMPANY CONFIDENTIAL

REV.	ECN. NO.	DESCRIPTION	ENG	DATE
X1		ISSUED	JORDAN	03/12/20
X2		UPDATE U.3 PCBA SCHEMATIC	JORDAN	04/08/20

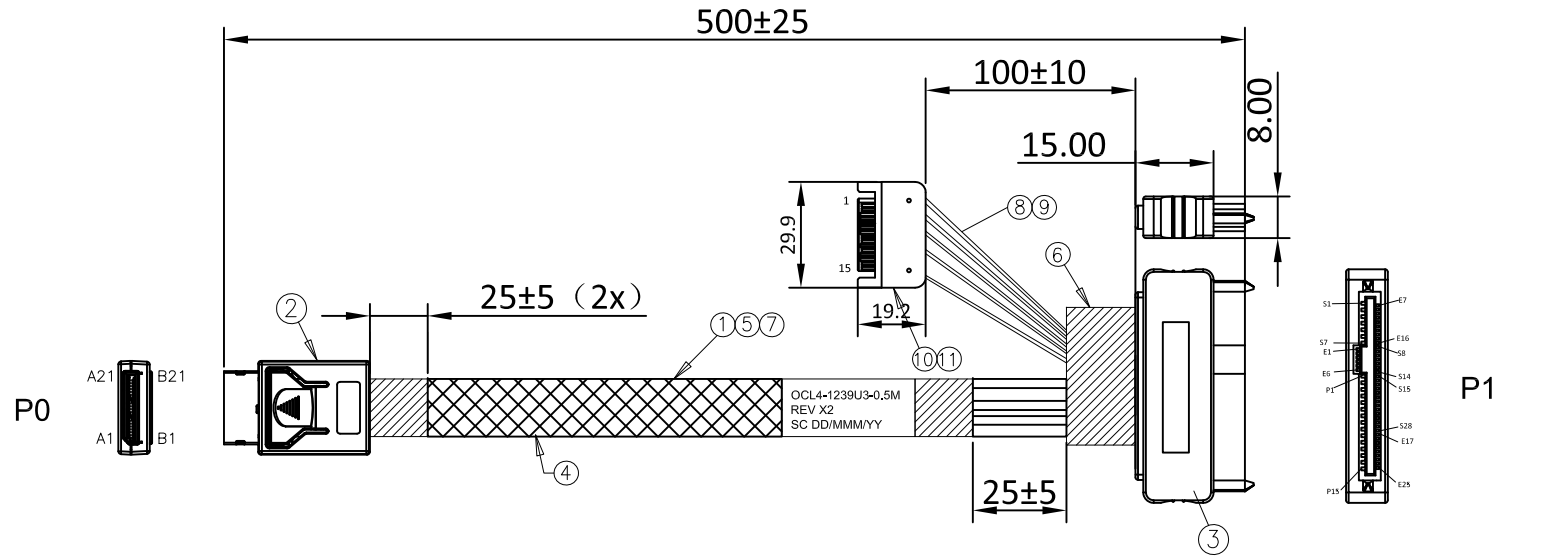

TEST CONDITIONS:

1. 100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST.
2. CONDUCTIVE RESISTANCE: 3Ω MAX.
3. INSULATION RESISTANCE: 10 MΩ
4. HI-POT TEST: 300VDC FOR 10ms.
5. THIS PRODUCT MEETS PCIe 4.0

LABEL DETAIL

11	PVC,45P,V1,BLACK	A/R
10	SATA CONN:15P,M,BLK	1
9	WIRE:18AWG	A/R
8	WIRE,24AWG	A/R
7	WIRE,30AWG	A/R
6	TAPE:ACETATE CLOTH INSULATION,BLK,HF	A/R
5	EXPANDO TUBE:OD=8MM,GREEN,VW-1,HF	A/R
4	LABEL: 30*60 MM,WHT,BLANK,HF	1
3	PCIE 68POS CONN,STR,BLACK,Au15u",85ohms	1
2	OCulink 4i STR with Active Latch,Black,85ohms	1
1	SAS CBL:UL20744,30#2C+2D+A+HM,Silvered,85ohm,BLU	A/R
ITEM	DESCRIPTION	QTY

GENERAL TOLERANCE		ANGLE TOLERANCE		DRAWN	DATE		
X ±		X° ± 5.0°					
.X ± 0.40		.X° ± 3.0°		CHECKED	DATE	TITLE.	
.XX ± 0.30		.XX° ± 2.0°				OCLINK 4X STR TO 8639 U.3 WITH SATA 15P	
.XXX ± 0.20		.XXX° ± 1.0°				PART NUMBER.	
MATERIAL SEE BOM		FINISH SEE BOM		APPROVED	DATE	OCL4-1239U3-0.5M	
SCALE N/A		UNIT mm				DRAWING NO.	
SHEET 1 OF 2						10-3224110008-01	
						SIZE A4	
						REV. X2	

